


# STABILITY Base


Assembly Instructions for both base sizes

STB-BASE & STB-TBASE

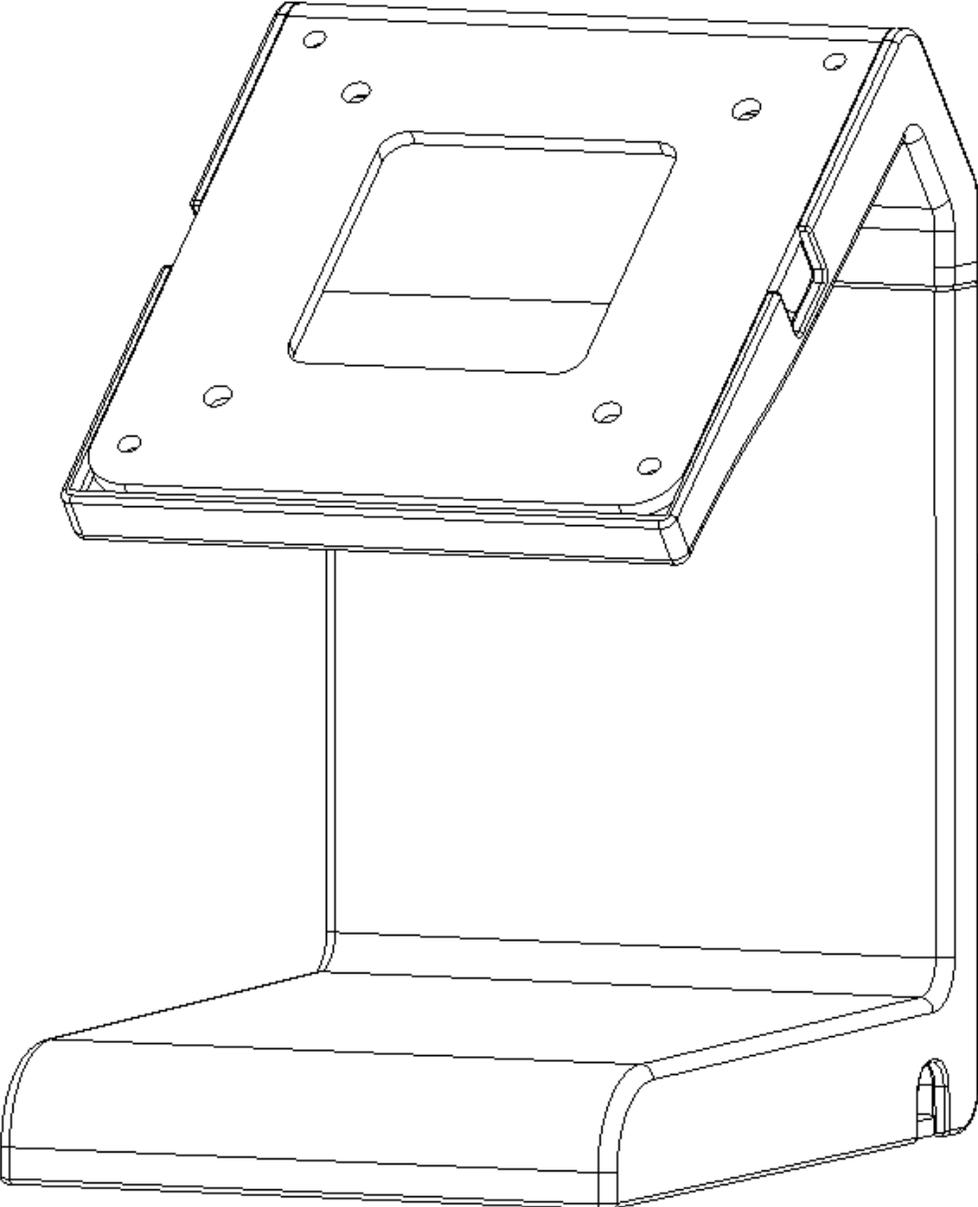

# Parts Included

a  
10-32x3/8  
Pan Head



(4)

b  
10-32x1/2  
Flat Head



(4)

c  
10-32x3/8  
Flat Head




(4)

d  
10-32 Nut




(4)

e  
Wire Management Top




(1)

f  
Wire Management Bottom



(1)

g  
Duraco  
Adhesive




(4)

h  
Rubber  
Hemisphere




(4)

# ① Remove Wire Management

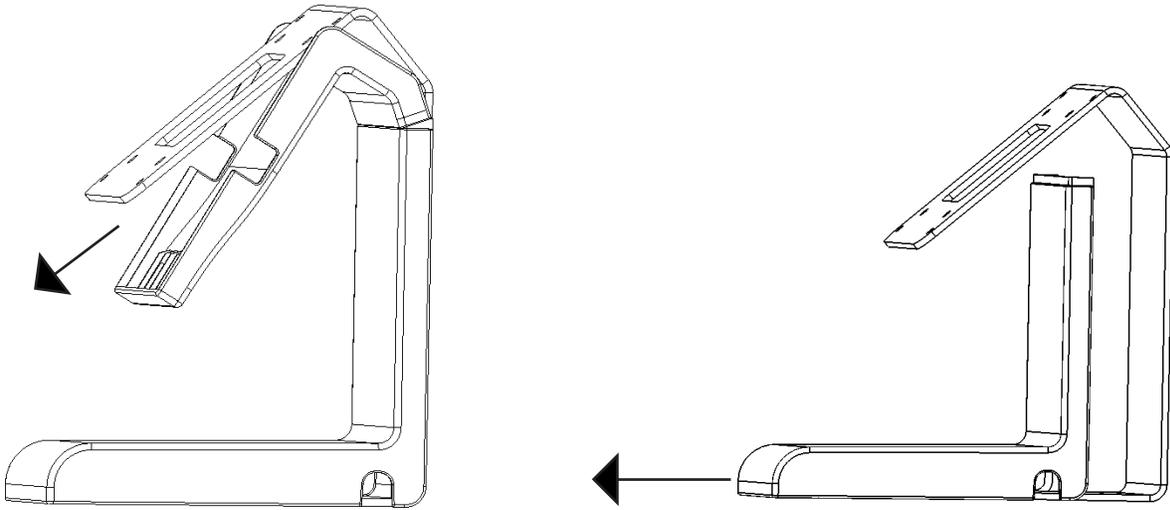


# ② Attach Backplate

②A

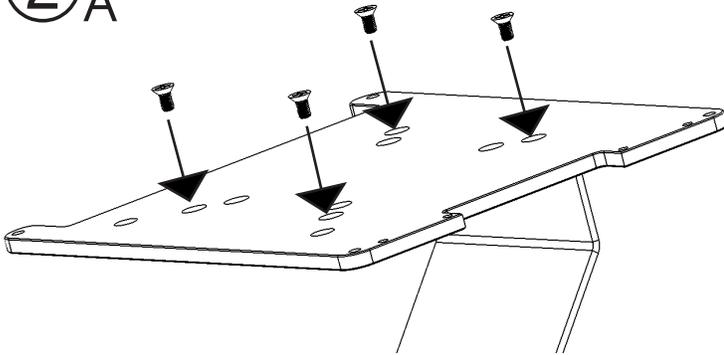

To mount your enclosure with no screws showing from the outside, use the included 10-32x3/8 (c) Flat Head screws and mount your backplate from the inside of the backplate

②B

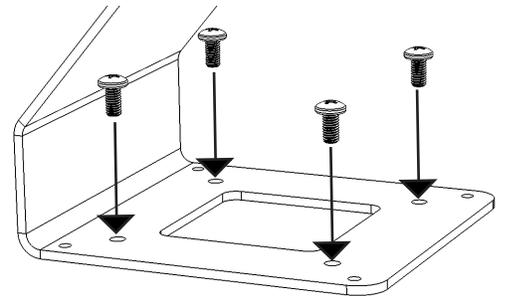






For easier disassembly of enclosure and base, use the included 10-32x3/8 (b) Pan Head screws and the inner set of holes to mount your backplate to the base from the backside

②C

\*Enclosures that only feature one set of mounting holes with no threads will require the use of (4)10-32x1/2 (b) screws along with (4)10-32 nuts (d) to secure the enclosure to the base


## ③ Route cable

\*Enclosures with internal cable routing can take advantage of option A shown below with the cable routed through the middle of the mounting plate. All other enclosures and devices will use option B coming out of either side of the wire management cover. If your countertop has a hole for wire management, you can take advantage of routing the cable down out the bottom of the base into the countertop hole for seamless integration.

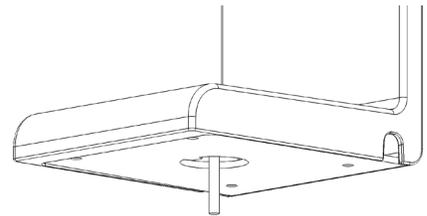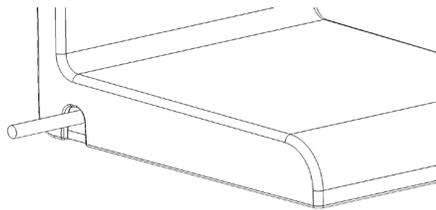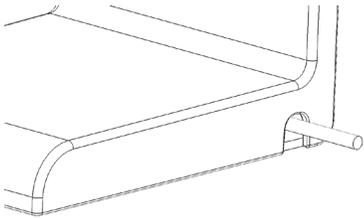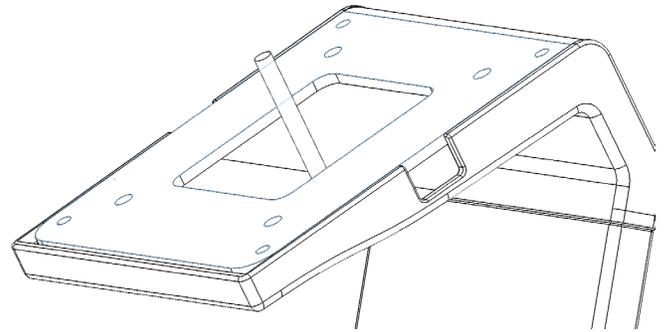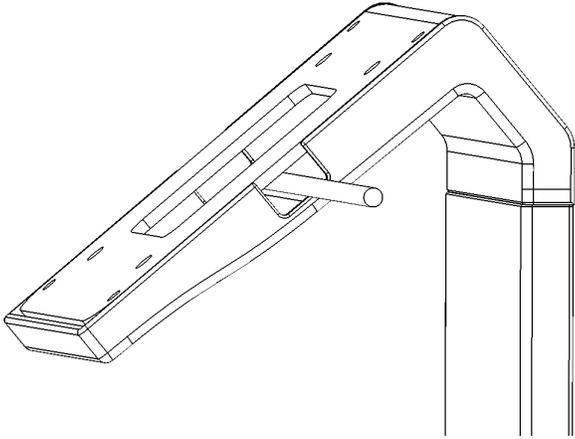

## ④ Reinstall Wire Management

\*Enclosures with internal cable routing can take advantage of option A shown below with the cable routed through the middle of the mounting plate. All other enclosures and devices will use option B coming out of either side of the wire management cover. If your countertop has a hole for wire management, you can take advantage of routing the cable down out the bottom of the base into the countertop hole for seamless integration.

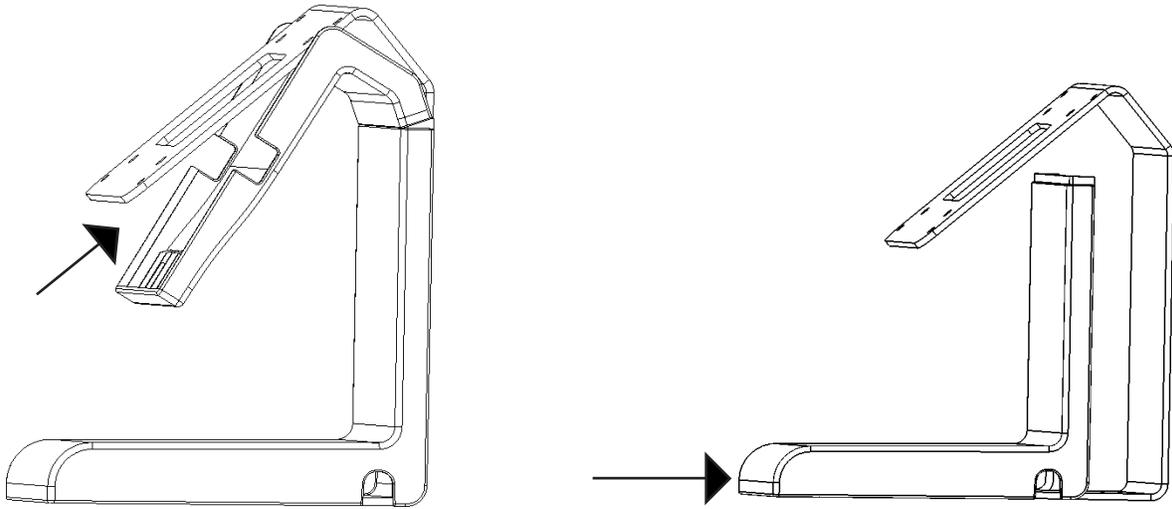


# Refer to tablet enclosure instructions to finish your solutions assembly




## Surface Mounting Options

### Standard

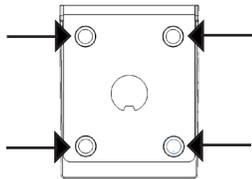

For a non-permanent mounting solution, use the (4) included black rubber hemispheres (h). Peel off the film and apply each hemisphere to the perimeter of the base as shown above

### Semi-Permanent



For a semi-permanent mounting solution, use the (4) duraco strips (g) included with your base. Peel off one side of the film and stick it to the four positions pictured above. Let the adhesive **cure onto the base for 3 hours** before peeling off the other side and sticking it to your desired surface. Once you have stuck the base down to a surface, let it sit for another **12 hours** with **NO** interaction before use. To remove duraco, take a piece of filament such as fishing line or dental floss and run underneath the base in a sawing motion to cut the adhesive

### Warranty

This product comes with VAULT's Lifetime Warranty. All items are covered under this warranty with the following exceptions.

- Damage caused from misuse, abuse, neglect, acts of God.
- Lost parts or surface scratches from use or other actions.
- Stripped or broken screws, warped parts from misuse or improper installation.

All warranty claims should be submitted through the company that you originally purchased the product from. A receipt or other documentation showing date and location purchased will be required. Shipping to VAULT and return shipping to the end user are the responsibility of the end user. VAULT reserves the right to substitute a newer product or one of equal or higher value. If you should have any questions concerning this policy or other items, please contact VAULT at the address contained in this document.